
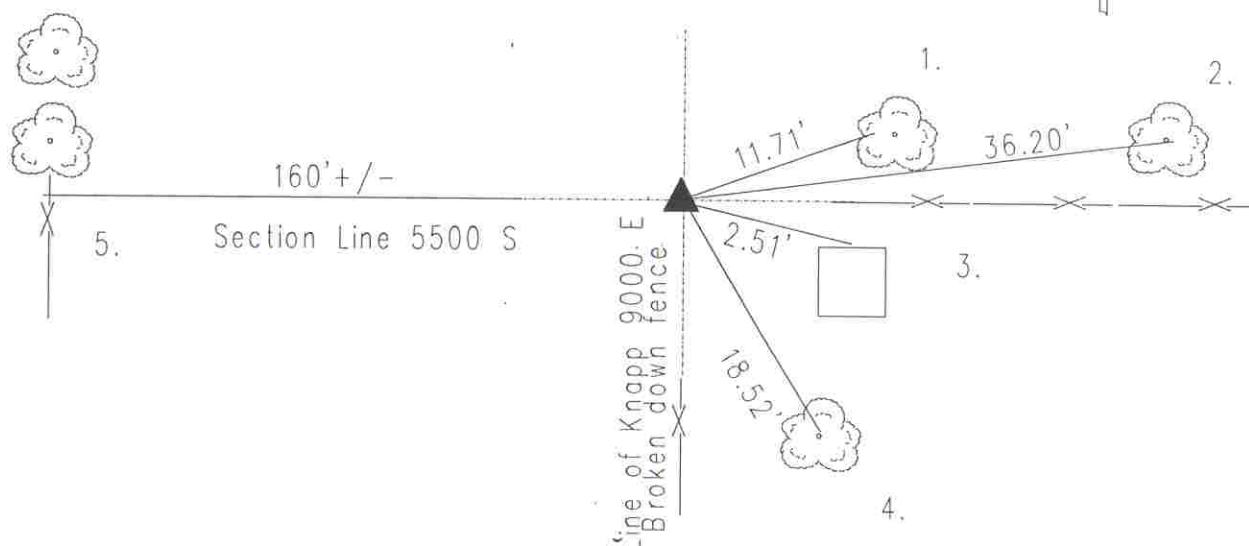


IN. S.P.C. E ZONE, NAD 83
NAME: 14050504
N: 493039.5602(m)
E: 70646.3407(m)

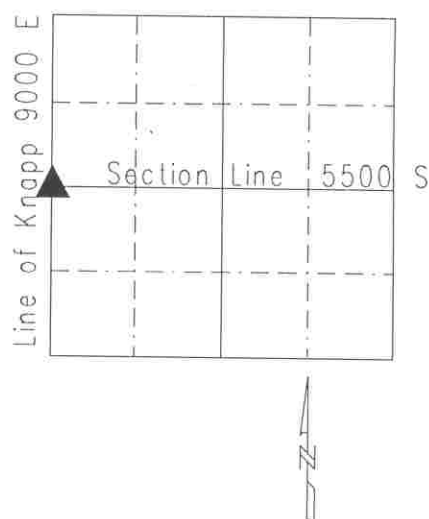

Original post set 1820 by John Hendricks with witnesses: 14" walnut N 64 E 14 links, 12" beech S 41 W 13 links. Recorded 40 ch. N of SW corner, and 3856 ch. S of NW of Sec. 5 (p.13, Marion County Atlas). 11-12 & 14-1850 Percy Hosbrook used the corner and noted "both witnesses green" and labeled it "K" in his survey and called the corner a stone (p.34, Franklin Twp. Survey Book). 3-10-1866 Wm. P. Smith recorded witnesses as: 18" walnut original and beech standing but dead "with a stone as the monument (p.33, Franklin Twp Book). 2-2001 recovered a rebar was accepted as the location of the W Q corner of Sec. 5-14-5 and a "Marion County surveyor" aluminum cap was placed on the rebar. Nearby stones were investigated but none appeared to be set, or marked to indicate any point other than the rebar found would be the section corner.

SC 450504

REF.	DISTANCE	DESCRIPTION
1.	11.71'	Mag nail w/brass washer N twin walnut 12"up
2.	36.20'	Mag nail w/brass washer N 40" pin oak 12"up
3.	2.51'	Mag nail w/brass washer N wooden fence post 6"up
4.	18.52'	Mag nail w/brass washer NE 10" hackberry 40"up
5.	160'+/-	Due W to tree line